

## DH-IPC-HDW3200

---

### 2Megapixel IR Network Dome Camera



#### Features

- 1/3" 2Megapixel progressive scan Exmor CMOS
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1080p
- DWDR, Day/Night(ICR), 2DNR, Auto iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.3~12mm varifocal lens
- Built-in 1/1 alarm in/out
- Max IR LEDs length 20m
- Micro SD memory, PoE

## DH-IPC-HDW3200


### Technical Specifications

Model	DH-IPC-HDW3200P	DH-IPC-HDW3200N
<b>Camera</b>		
Image Sensor	1/3" 2Megapixel Exmor CMOS	
Effective Pixels	1920(H)x1080(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual 1/3~1/10000	Auto/Manual 1/4~1/10000
Min. Illumination	Color: 0.1Lux/F1.2, B/W: 0.01Lux/F1.2; 0Lux/F1.2(IR on)	
S/N Ratio	>50dB	
<b>Camera Features</b>		
Max. IR LEDs Length	20m	
Day/Night	Auto(ICR)/Color/B/W	
Backlight Compensation	Off/BLC/HLC/DWDR	
White Balance	AUTO	
Gain Control	Auto/Manual	
Noise Reduction	2D	
Privacy Masking	Up to 4 areas	
<b>Lens</b>		
Focal Length	3.3-12mm	
Max Aperture	F1.4	
Focus Control	Manual	
Angle of View	H: 79.3°(Wide)~29.8°(Tele)	
Lens Type	Manual/Auto Iris (DC)	
Mount Type	Board-in Type	
<b>Video</b>		
Compression	H.264 / MJPEG	
Resolution	1080P(1920×1080) 720P(1280×720) D1(704×576) / CIF(352×288)	1080P(1920×1080) / 720P(1280×720) / D1(704×480) / CIF(352×240)
Frame Rate	Main Stream	1080P/720P(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps	
<b>Audio</b>		
Compression	G.711a / G.711u (64kbps)/ PCM(128kbps)	
Interface	1/1 channel In/Out	
<b>Network</b>		
Ethernet	RJ-45 (10/100Base-T)	
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF	ONVIF Ver. 2.0	
Max. User Access	10 users	

## DH-IPC-HDW3200

Smart Phone	iPhone, iPad, Android, Windows Phone
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 32GB
Alarm	1/1 channel In/Out
<b>General</b>	
Power Supply	DC12V, PoE(802.3af)
Power Consumption	<6W
Working Environment	-10°C~+60°C, 10%~90%
Dimensions	Φ140.3x113.7mm
Weight	0.8kg

### Dimensions (mm)

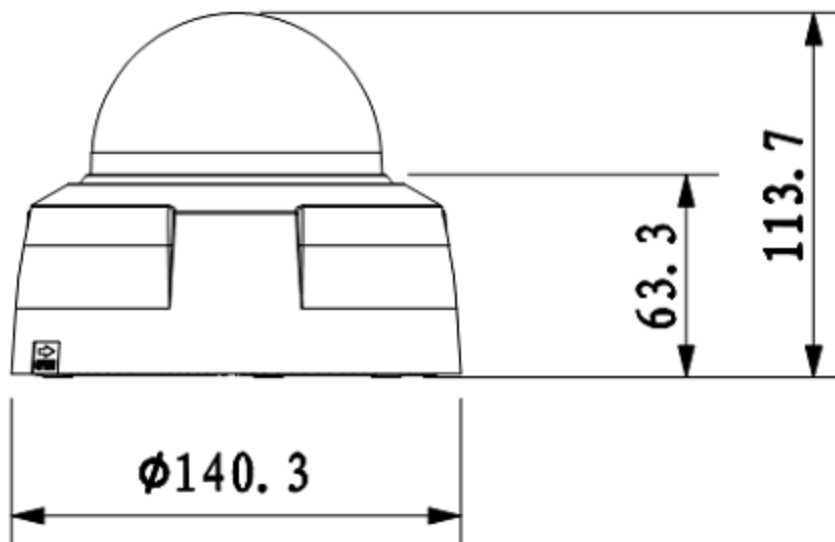

---

#### Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatechsecurity.com](http://www.dahuatechsecurity.com)

\*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.